


DEWATERING SCREENS



Precision **ENGINEERS**
Manufacturers of Mining & Processing Industry Machinery & Spares

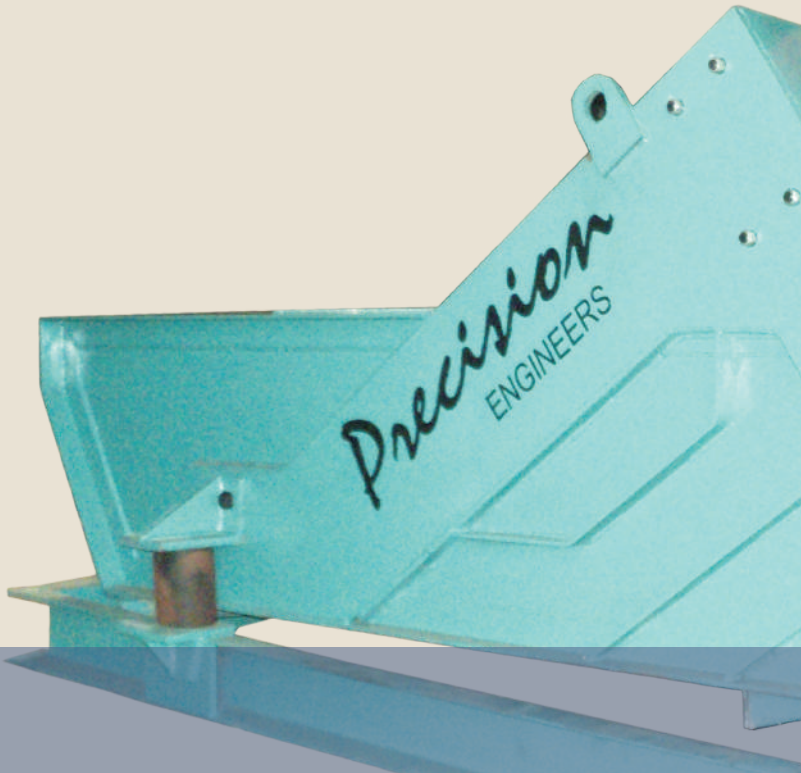

DEWATERING SCREENS

We offer following range of High frequency Dewatering Screens for use in variety of applications.

The machine is fitted with modular Poly-urethane panels, fixed by pin and sleeve, having an advantage of quick removal and replacement.

The vibrations are provided through 2 Nos sturdy Vibro-motors

The typical output product has less than 14% moisture.

The screen is mounted on 4 Nos special rubber buffer mounts.

Size	Power Input	Weight	Capacity
1 m x 2.75 m	2 x 2.28 kw	2000 kgs	50 tph
2 m x 2.75 m	2 x 4.30 kw	2600 kgs	100 tph
2 m x 4.3 m	2 x 7 kw	5400 kgs	200 tph

Standard Features :


- ❑ Modular poly-urethane panels fixed by pin and sleeve, aperture opening : 0.2 mm x 12 mm onwards
- ❑ 2 Nos High frequency Vibro-motors
- ❑ 4 Nos special rubber buffer mounts
- ❑ Control panel : pre-wired

Optional Features :

- ❑ Water spray bars
- ❑ Output Discharge chute
- ❑ Water discharge chute

How It Works ...

- Feed Material In
- Material Washed & Dewatered
- Fines Removed
- Dry, Washed Product Discharged

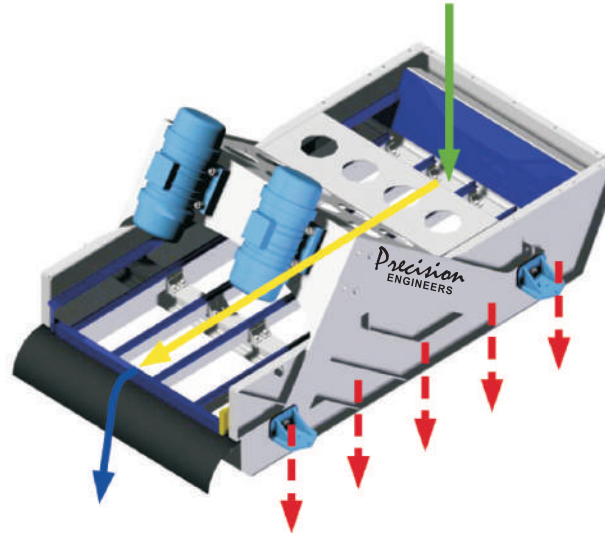

Precision ENGINEERS

391, M. G. Road, Tilakwadi, Belgaum - 590 006.

Mobile : 0 94484 61097 Telefax : 0831-2461097 E-mail : precision.engineers391@gmail.com